



## Overview

ACOUSTIC SIGNALS - INDUSTRIAL & FIRE - ELECTRONIC SOUNDER

The Sonos Sounder series of electronic sounders is designed for versatile use in fire and industrial signalling.

With the TimeSaver base, connections are made to the base during the initial wiring phase, which results in a faster and more reliable installation. The Sounder head 'twists and clicks' onto the base on commissioning, avoiding the wiring and connection problems associated with traditional sounders.

With a choice of 32 tones, including all major international standards, the Sonos Sounder meets the needs of most international system requirements. **Please note EN54 Pt:3 certification is available for DC units only.**

Deep Base units have weatherproof protection to IP65 and can be used in all locations both indoors and outdoors. The units are available in either **Red** or **White** and with a choice of **Deep** or **Shallow** TimeSaver bases.

## Features

- Continuously rated
- 2 Stage Alarm
- Simple «First Fix» installation
- Synchronized alarm tones
- Volume control -20dB
- Compliance :
  - EN54-3 Type A (Shallow Base)
  - EN54-3 Type B (Deep Base)
- Rated IP65 when fitted with Deep Base
- Available in 9-60vDC or 110-230vAC

## Material

- Flame Retardant Polycarbonate

**IP** Up to IP65\*

**Speaker Icon** Up to 106dB (A) @ 1m

**Music Note Icon** 32 Tones

**Thermometer Icon** -25 to +70°C

**Waveform Icon** 50/60Hz

\*If fitted with a Deep Base, otherwise IP21

## APPROVALS & CONFORMITIES



## Ordering Information


| Voltage       | Ordering Information |        |         |      | Mode & Current Consumption* |
|---------------|----------------------|--------|---------|------|-----------------------------|
| Voltage Range | Product Code         | Colour | Base    | IP   | Tone Dependent              |
| 9-60vDC       | PSS-0003             | Red    | Shallow | IP21 | 4-41mA                      |
| 9-60vDC       | PSS-0039             | White  | Shallow | IP21 | 4-41mA                      |
| 9-60vDC       | PSS-0020             | Red    | Deep    | IP65 | 4-41mA                      |
| 9-60vDC       | PSS-0050             | White  | Deep    | IP65 | 4-41mA                      |
| 110-230vAC    | PSS-0060             | Red    | Deep    | IP65 | 50mA                        |
| 110-230vAC    | PSS-0063             | White  | Deep    | IP65 | 50mA                        |

\*Current consumption is dependent on the Tone selected


## Weights & Dimensional Drawings

| Kg         | Shallow Base | Deep Base |
|------------|--------------|-----------|
| Net Weight | 0.220        | 0.250     |

Deep Base

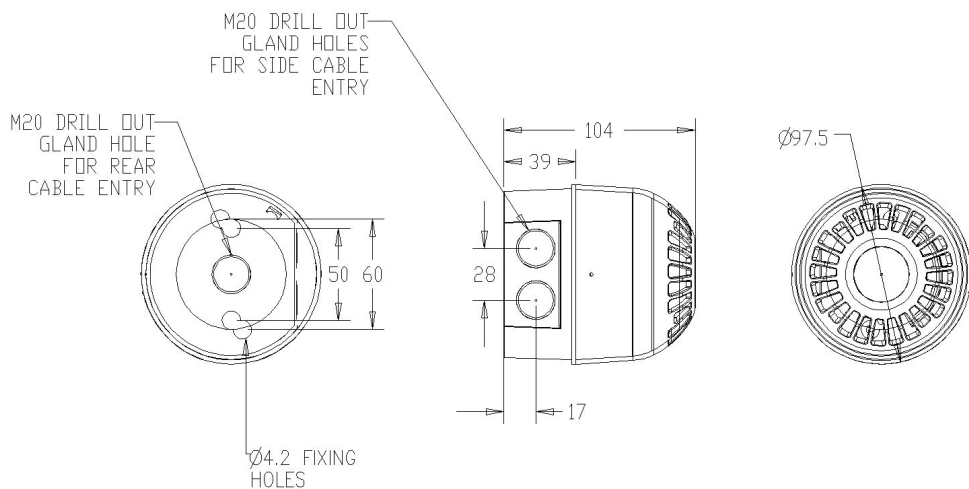

Shallow Base

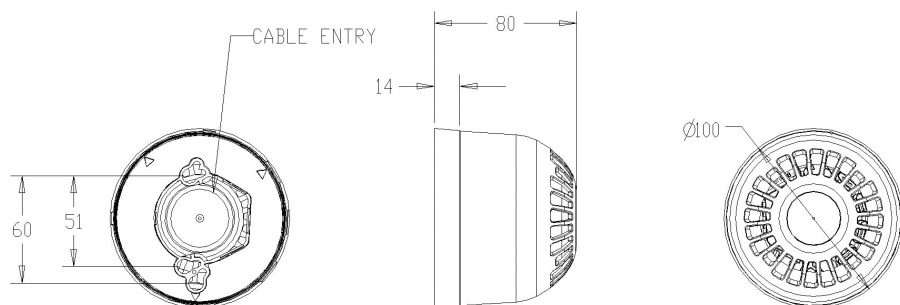

## APPROVALS & CONFORMITIES

