



ACOUSTIC SIGNALS - INDUSTRIAL - ELECTRO MECHANICAL BUZZER

The FLE can also be used in automotive applications (reversing alarm/forklift trucks, etc.) and has an optional back box that will be required for weatherproof applications, allowing termination inside the protected enclosure. Accessories (see accessories section) increase the FLE's protection rating to IP65, enabling it to be used for both indoor and outdoor applications.

- Multi purpose alarm
- Low frequency sound
- Optional back box - See accessories on page 2
- Rated IP65 when used with Back Box
- Available in 24-48vAC/DC and 115-230vAC/DC

- FLE : Powder Coated Mild Steel
- Back box : Black ABS with cable gland
- Surface Mount box : Beige ABS with cable gland

IP IP55

 Up to 112dB (A) @ 1m

 ON 3 MIN | OFF 5 MIN

Hz 420 Hz

 -30 to +80°C


APPROVALS & CONFORMITIES

Ordering Information

Voltage	Ordering Information	Current Consumption & dB	
Voltage Range	Product Code	Current Consumption	dB
24-48vAC/DC	14802	750mA @24vDC	108
110-230vAC/DC	14806	420mA @230vAC	112

Weights & Dimensional Drawings

Kg	24-48v	115-230v
Net Weight	0.650	0.645
Gross Weight	0.765	0.760

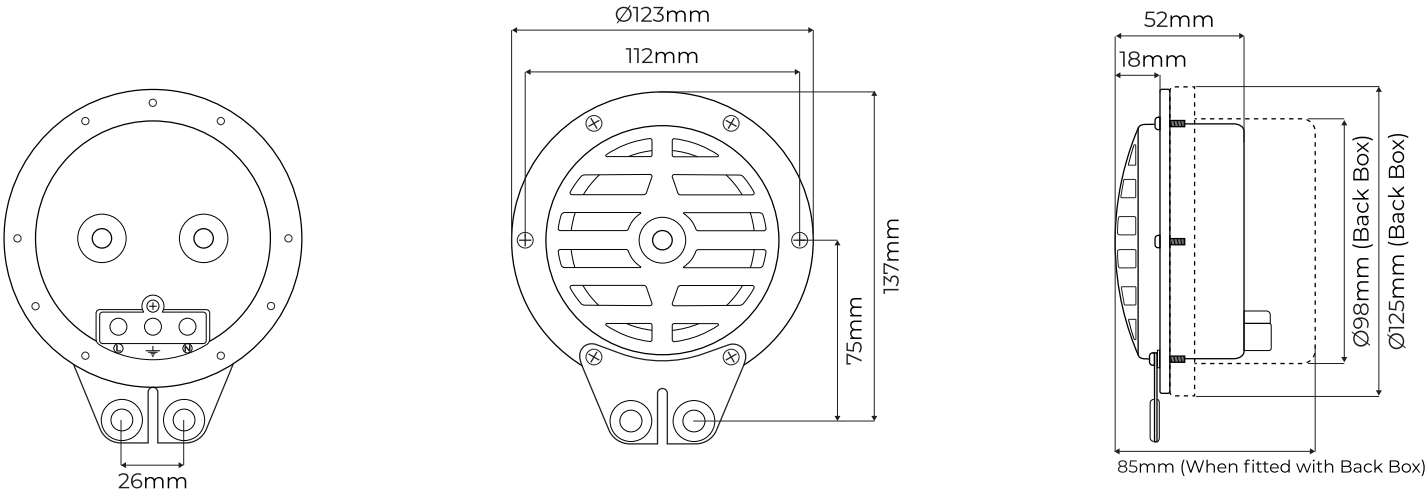


Accessories

Part code	Description
14555K	Weatherproof Back Box
14704K	Surface-mounted Weatherproof Box



14555K

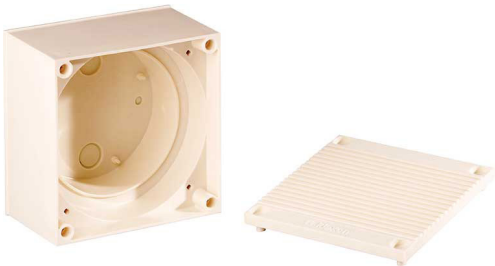

14704K

APPROVALS & CONFORMITIES

✉ uksales@moflash.co.uk
moflashkm@moflash.com
exportsales@moflash.co.uk

☎ UK +44(0)121 446 5322
FR +33(0)1 70 72 12 71

📍 11 Upper Conybere Street
Highgate, Birmingham
B12 0EB, England

🌐 www.moflash.com

