



Clifford & Snell

Yodal[®] Ex YL5IS Hi-Vis



Intrinsically Safe Device

**Audible and Visual signal for use in
Potentially Explosive Atmospheres**

PRODUCT FEATURES

- Max sound output 105 dB (A) 1m
- IP66 rated**
- LED Long Life Array
- 32 selectable tones meeting international regulations
- 2 stage alarm
- Flame retardant ABS & Polycarbonate enclosure
- Low current consumption
- Lenses available in 8 colours
- ATEX & IECEx* Approved
- Zones 0, 1, 2, 20, 21, 22



Product Approvals



Sounder Certificate Number:
ER022ATEX0002X



Beacon Certificate Number:
ER022ATEX0001X



Sounder Certificate Number:
EMA22UKEX0004X

Beacon Certificate Number:
EMA22UKEX0003X



Beacon Certificate Number:
IECEx EMT 22.0001X

TECHNICAL DATA

Certification

Type	Product Approvals
YL5IS/ISC/T4	II 1 G Ex ia IIC T4 Ga II 1 D ia IIIC T ₂₀₀ 110°C Da
Zones	0, 1 & 2 (Gas Groups > IIC) 20, 21 & 22 (Dust Group > IIIC)
Conforms to	IEC 60079-0:2017 (Beacon only), EN IEC 60079-0:2018 IEC 60079-11:2011 (Beacon only), EN 60079-11:2012

*Sounder ATEX approved only, LED Beacon ATEX & IECEx approved

Ambient Conditions

Operating temperature	-25 °C to +40 °C
Storage temperature	-40 °C to +70 °C
Max. Relative humidity	95% at 40 °C

Acoustic Data

Maximum Volume Output	105dB (A)
Volume Control Adjustment	-15 dB (A)
32 selectable tones via DIL-switch	
2 Stage Alarm with predetermined second stage as standard.	

Luminous characteristics

Light Emitting Diode	8 off LED Array
Flash Rate	60 FPM (1Hz)
Lens Colour	Amber, Yellow, Red, Green, Opal, Blue, Magenta, Clear

Line integrity on DC systems

If line monitoring is required an end-of-line resistor is needed and should have a minimum resistance of 750 Ohm and rated power of at least 2W or a 4700 Ohm and a rated power of at least 0.4W. For end of line monitoring, a suitable barrier/isolator will be required that allows for reverse polarity connection (see page 3 for Moflash recommend barriers).

Mounting / Installation

Devices should be mounted to a suitable flat wall or bulkhead avoiding any undue vibration and using the two lugs projecting from the case. The lugs are bored 8mm on 153mm centres. The minimum length of fixing screw required is 25mm. To maintain the IP rating of the enclosure, the cable entries must be fitted with a suitably rated cable gland (not included). Max cable termination 2.5mm².

To maintain the Intrinsically Safe integrity of the product a suitable rated Galvanic Isolator or Zener barrier must be used (see page 3 for Moflash recommend barriers).

The YL5IS Hi-Vis can be wired as individual components (i.e. sounder and beacon on separate channels) or the sounder and beacon can be wired together to activate at the same time on one channel, however the entity parameters must be observed for both variations.

Mechanical Data


Enclosure Material	ABS FR UL94 5VB
Lens Material	UV Stable Polycarbonate
External Fixings	Stainless Steel
Degree of protection	Up to IP66 (IEC60529) ** Subject to the correct cable gland being fitted

Electrical Data

Operating Voltage	16.2 to 26.4V		
Current consumption	Power Supply	Certified barrier/ Isolator parameters	Current Consumption Tone 1
	24vDC	28v/300 Ω	24 mA
	18vDC	28v/300 Ω	33 mA
(Current for combined operation)			
Certified input parameters	Beacon		Sounder
Independent Wiring	U _i =	28v	28v
	I _i =	93 mA	93 mA
	P _i =	0.66w	0.66w
	C _i =	0	0
	L _i =	0	0
Combined Supply	U _i =	28v	
	I _i =	93 mA	
	P _i =	0.66w	
	C _i =	0	
	L _i =	0	
Line monitoring	Yes		

Dimensional Drawing

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding. All Dimensions in mm [inches] - Subject to alterations

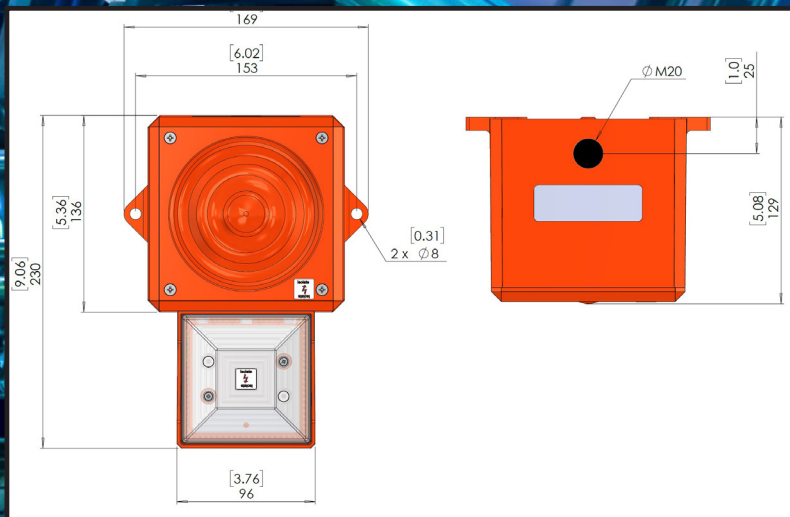

SELECTION

Product Approval	Enclosure Colour	Safety Barrier	Temperature Class	Lens Colour	Effective Candela	Order number	Art. No.	Weight (Kg)
YL5IS Hi-Vis Sounder/Beacon ATEX Approved	Red Flame (RF) RAL 2002	ISC	T4	Amber	2.68	YL5/ISC/T4/A/HV/RF	245540	1.09
				Red	2.08	YL5/ISC/T4/R/HV/RF	245541	1.09
				Green	21.12	YL5/ISC/T4/G/HV/RF	245542	1.09
				Opal	3.52	YL5/ISC/T4/O/HV/RF	245543	1.09
				Blue	1.88	YL5/ISC/T4/B/HV/RF	245544	1.09
				Clear	8.16	YL5/ISC/T4/C/HV/RF	245545	1.09
				Yellow	9.46	YL5/ISC/T4/Y/HV/RF	245546	1.09
				Magenta	2.31	YL5/ISC/T4/M/HV/RF	245547	1.09

Systems Installation

The Sounder must be installed in accordance with the latest EN 60079-0 & EN 60079-11 standards or equivalent IEC standards, with consideration for any local installation requirements, and should only be carried out by appropriately competent and qualified personnel. Moflash Signalling is not able to offer any assistance with additional system parameters beyond that included on the installation sheet, and can not give advice on individual system installations. The system integrators should be contacted for any additional installation requirements.

ACCESSORIES

WARNING: Connection into these Sounder/Beacons must be via a suitably rated Zener Barrier or Galvanic Isolator. Never connect the sounder or beacon directly to the voltage supply without a barrier in place. Failure to do so will result in permanent damage to the PCB & void the warranty.

Product		Description	Order number	Art. No.	Weight
Zener Barrier		Single Channel DC	Z 728	071788	0.150
		Single Channel AC	Z 928	071857	0.150
Galvanic Solenoid Driver		Single Channel	KCDO-SD3-Ex1.1045	304983	0.150
		Dual Channel	KFDO-SD2-Ex2.1045	242032	0.100
Relay Module		Dual Channel	KFDO-R0-Ex2	038975	0.100
Cable Gland		M20 Nylon IP68		50002	0.05